


## Multi Blind Rivet AL

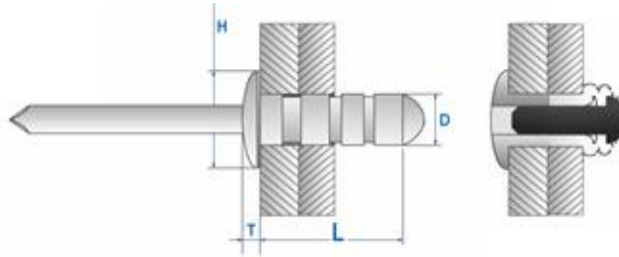

H = Head Diameter  
T = Head Thickness  
M = Length  
D = Rivet Diameter

\*Dimensions in millimeters

Rivet Diameter (D) nom.	Hole Size +0.1	Length (M) max.	Grip Range	Head Diameter (H) max.	Head Thickness (T) max.	Standard Strength (kN) typ.	
						Shear	Tensile
3.2	3.3	6.0	0.5~3.0	6.6	1.3	0.5	0.7
		8.0	1.0~4.8				
		11.0	1.0~6.0				
		13.0	3.0~8.0				
		16.0	3.0~11.0				
4.0	4.1	8.0	1.0~4.0	8.2	1.5	0.8	1.5
		11.0	1.0~6.0				
		13.0	3.0~9.0				
		16.0	5.0~11.0				
		20.0	5.0 -14.0				
4.8	4.9	8.0	1.0~3.6	9.9	1.7	1.4	2.0
		11.0	1.0~6.0				
		13.0	3.0~8.0				
		16.0	3.0~11.0				
		20.0	5.0~15.0				
		22.0	6.0~17.0				
		25.0	6.0~20.0				
6.3~6.5	6.6~6.8	13.0	1.6~4.8	13.2	2.8	2.5	3.0
		25.0	4.0~17.0				