


Folding HS Rivet

| | |
|-------------------------------|-------------------|
| Head Type | Dome Head |
| Material(Body/Mandrel) | AL 5056 / AL 7075 |
| Finish(Body/Mandrel) | Natural / Natural |

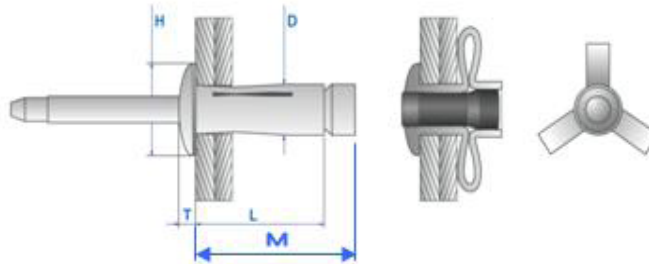

H = Head Diameter
 T = Head Thickness
 L = Body Length
 M = Length
 D = Body Diameter

*Dimensions in millimeters

| Rivet Diameter (D) nom. | Hole Size | Body Length(L) max. | Length(M) max. | Grip Range | Head Diameter (H) max. | Head Thickness (T) max. | Standard Strength (kN) typ. | |
|-------------------------|-----------|---------------------|----------------|------------|------------------------|-------------------------|-----------------------------|---------|
| | | | | | | | Shear | Tensile |
| 4.8 | 5.2~5.3 | 22.6 | 30.7 | 1.3~6.3 | 11.3 | 2.2 | 3.1 | 2.0 |
| | | 25.0 | 33.0 | 4.8~9.5 | | | | |
| | | 28.5 | 36.3 | 9.5~14.3 | | | | |
| | | 33.0 | 41.1 | 14.3~19.0 | | | | |
| 6.4 | 6.4~6.6 | 23.5 | 33.0 | 1.5~6.5 | 14.2 | 2.9 | 6.0 | 4.5 |
| | | 26.7 | 36.1 | 4.8~9.5 | | | | |