


# HS Structural Folding Blind Rivet AL

<b>Head Type</b>	Low Profile Flat Head
<b>Material(Body/Mandrel)</b>	AL Alloy / AL Alloy
<b>Finish(Body/Mandrel)</b>	Polished / Natural

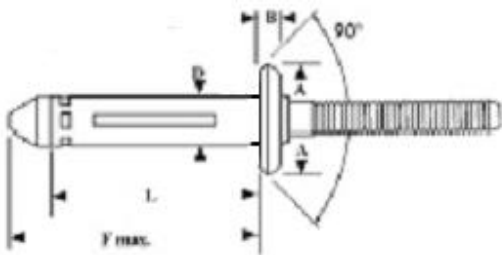

A = Head Diameter  
 B = Head Thickness  
 L = Body Length  
 D = Rivet Diameter  
 F = Body All Length

\*Dimensions in millimeters

Rivet Diameter (D) Max	Hole Size	Body Length (L) Max	Body Length (F) Max	Grip Range	Head Diameter (A)	Head Thickness (B) MAX	Standard Strength (lbs) Typ	
							Shear	Tensile
5.2 (3/16")	5.3~5.6	19.6	23.8	3.20~6.35	10.9~11.6	1.5	600	400
		23.0	27.0	4.75~9.50				
		26.0	30.0	6.35~12.7				
		29.0	33.3	9.50~15.8				
		32.3	36.5	12.7~19.0				
6.3 (1/4")	6.4~6.6	21.0	25.6	3.20~6.35	13.6~14.0	1.8	1000	600
		24.0	29.0	4.75~9.50				
		27.0	32.0	6.35~12.7				
		30.0	35.0	9.50~15.8				