



## Closed Blind Rivet



<b>Head Type</b>	Dome Head
<b>Material(Body/Mandrel)</b>	AL Alloy / Carbon Steel
<b>Finish(Body/Mandrel)</b>	Natural / Zinc Plate

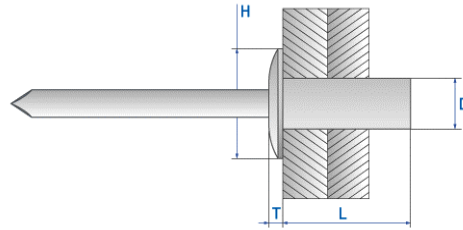

H = Head Diameter  
 T = Head Thickness  
 L = Body Length  
 D = Rivet Diameter

\*Dimensions in millimeters

Rivet Diameter (D) nom.	Hole Size +0.1	Body Length (L) max.	Grip Range	Head Diameter (H)	Head Thickness (T) max.	Standard Strength (kN) typ.	
						Shear	Tensile
3.2	3.3	7.5	0.8~1.6	6.4	1.3	1.1	1.2
		9.1	1.6~3.2				
		10.7	3.2~4.8				
		12.3	4.8~6.4				
		13.9	6.4~8.0				
		15.5	8.0~9.6				
		18.7	9.6~12.8				
4	4.1	9.5	0.8~3.2	8.3	1.7	1.6	2.1
		11.1	3.2~4.8				
		12.7	4.8~6.4				
		14.3	6.4~8.0				
		15.9	8.0~9.6				
		19.1	9.6~12.8				
4.8	4.9	10.3	0.8~3.2	10.0	2.0	2.2	3.1
		11.9	3.2~4.8				
		13.5	4.8~6.4				
		16.7	6.4~9.6				
		19.8	9.6~12.8				
		23.0	12.8~16.0				